
TP-CP-ISO-25PK

25-pack TruPortal credential, classic ISO cards, proximity (EM), no magstripe, gloss/gloss

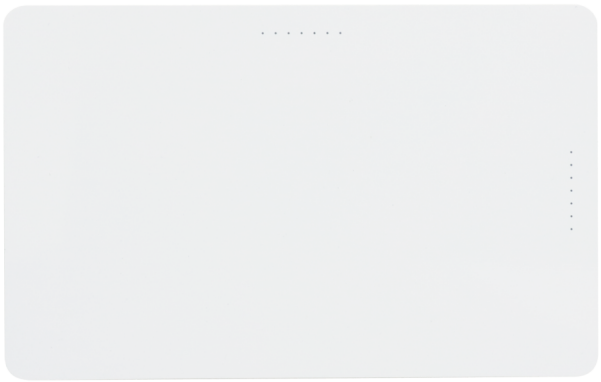

TP-CP-ISO-25PK

25-pack TruPortal credential, classic ISO cards, proximity (EM), no magstripe, gloss/gloss

Technical specifications

System

Reading distance	1 to 5 cm
Custom data model	No
Card slot punch	No

Technology

Credential type	Proximity
Credential operating frequency	125 KHz
Support technology 125 KHz	GE ProxLite/CASI Prox

Printing

Direct surface printing	Yes
Thermal transfer printing	Not recommended

Ordering information

Minimum order quantity	1
Cards/tags in package	25
Special card order form required	No

Physical

Surface cover	Glossy
Material	PVC
Form factor	CR80 (Credit)
Physical dimensions	55 x 85 x 20 mm
Net weight	150 g
Shipping weight	160 g
Colour	White

Environmental

Operating temperature	-10 to 45°C
Storage temperature	-10 to 45°C
Relative humidity	5 to 95% noncondensing

Regulatory

Compliancy	RoHS

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 21 May 2024 - 17:24