NC-DBR-W

Socle pour relais conventionnel (blanc)

General

The NC-DBR-W is an NC series surface mount first-fix relay base offering one change over relay. It allows any NC Series conventional point detector to be inserted, removed or replaced without rewiring using an easy twist and lock action. The added potential free relay function allows for low cost control to non-critical functions such as door release, air conditioning shutdown or elevator control without the need for additional device installation. The status of the relay is associated with the alarm situation of the associated detector.

Ease of Installation

Forming an integral part of the detector assembly, NC Series standard bases are provided with key-hole slots for screw fixing direct to ceiling structures or conduit boxes. Large rear cable entry allows for easy wiring to the base.

For special applications a base accessory is available for surface installations, ensuring an easy and practical installation.

Ease of Wiring & Testing

Clearly marked terminals ensure correct and secure wiring termination for zone and relay connections.

Ease of Use

Inserting the NC Series detector into the base is accomplished with a simple turn and lock mechanism. To prevent unauthorised removal of a detector from its base, an easy-to-activate locking mechanism is incorporated into all NC series detectors. If activated, a detector can only be released from its base using a dedicated tool.



Détails

- Common first-fix mounting base for all white NC-Series detectors
- Single potential free contacts for easy external function control
- A selectable detector locking mechanism protects against unauthorised removal
- Large rear cable entry with ample space for cables
- Flexible installation fixture with first fix screw feature reduces installation time and effort
- Clearly visible terminal marking avoids incorrect cabling
- Robust, wiring terminals for easy installation
- Simple twist-and-lock detector action ensures the detector is properly inserted
- Dual contact points on every connector for reliable detector/base contact

NC-DBR-W

Socle pour relais conventionnel (blanc)

Spécifications techniques

General

Status indication	None
Compatibility	NC-Series point detectors
Reset voltage	< 1 VDC
Reset time	Linked to detector
Connectivity	2-wire zone and NO/COM/NC contacts

Electrical

Power supply type	Zone powered
Operating voltage	9.5 to 28 VDC (24 VDC typical)
Current consumption	Excluding detector ≤10uA (standby) ≤10mA @ 9.5 VDC (active)
Cable specification	1.0 to 2.1 mm² (17 to 14 AWG) shielded or unshielded twisted-pair
No. of cable cores	2 for zone
Terminals	7 used (3 Zone in/out + COM, NO, NC)

Output

Output quantity	1
Output type and rating	Single pole, change over, 1 A @ 30 VDC / 0.3 @ 125 VAC (resistive)

Physical

Physical dimensions	100 x 21.3 mm (Ø x H)
Net weight	70.1 g
Colour	Traffic white (RAL9016)
Mounting type	Ceiling mount
Cable entries	1
Material (body)	ABS
Fixing centres	2 (45 to 75 mm)
Material (contacts)	QSn6.5-0.1 (Tin-phosphor bronze)

Environmental


Vandal proof	No
Operating temperature	−20 to +65°C
Storage temperature	−30 to +75°C
Relative humidity	10 to 93% (noncondensing)
Environment	Indoor
IP rating	IP3x

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CPR
Standards	EN54-18

Produits compatibles

Catégorie	Référence	Description
Detection device	NC-BA-SM-W	Konventionelles Sockelzubehör - Auputzmontage (Weiß)
Detection device	NC-DPH-W	Détecteur de chaleur conventionnel (blanc)
Detection device	NC-DPM-W	Konventioneller Multisensor-Brandmelder (Weiß)
Detection device	NC-DPO-W	Konventioneller optischer Rauchmelder (Weiß)

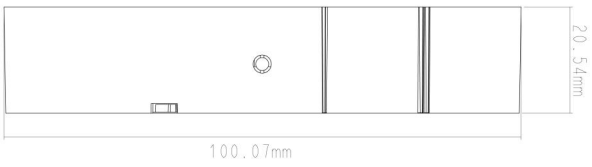

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57