2010-2-UC240-KIT

Kit UC240 Kit (com caixa) para painel de incêndio, comunicador UltraSync com IP e 4G/2G

Overview

UC240 UltraSync communicator is a dual path alarm signalling unit for transmitting alarm signals from a customer's alarm panel to a Central Monitoring Stations (CMS). The monitoring path is based on IP and SIM 4G/2G mobile technology. The unit is designed for use in both security and fire systems.

• Dual-path monitoring for low, medium and high risk sites, covering intruder applications, fire and more.


• These monitored alarm signalling devices are small enough to fit inside most alarm panels. They use two signalling paths – if the primary path is down, the secondary path kicks in. And if that happens, the secondary path will use the primary path reporting and polling times.

• The primary path uses IP technology to send alarm signals over the customer's network or broadband hub.

• The secondary path uses 4G or 2G mobile connectivity – with dual SIMs for extra resilience.

• EN50131 Grade 3 and EN50136 certified for intrusion systems.

• EN54-21 certified for fire alarm systems.

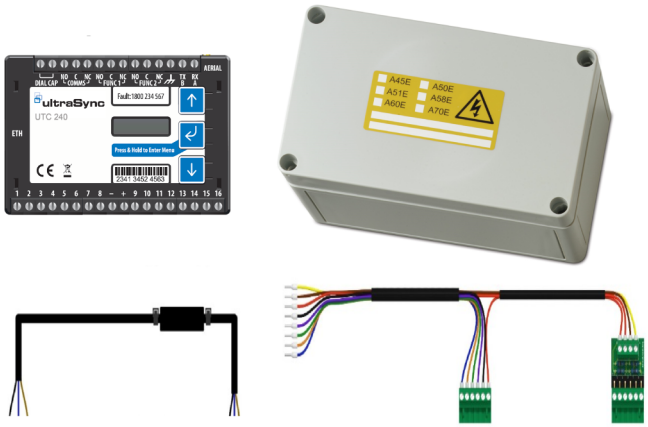

Alarm panel interfaces

• 16 general purpose alarm inputs (Logic High = +2 to +30 V / Logic Low = <1.3 V)

• 3 relay outputs

• Unconnected state: Logic Low

• Standard screw terminals

• Programmable function output-for remote control of site devices

• Line fault output-for status indication at site of alarm signalling path

• Dial Capture with phone line simulation

• Onboard RS232 or RS485 for direct panel interface to some panels

Dial Capture features

• Converts dialler alarm systems into high security signalling devices

• Alarm panel interface supports: Ademco Contact ID, Ademco Hi Speed, Ademco 4+1, Ademco 4+2, SIA 1/2/3

Configuration

• Simple single push button pin learn

• iOS and Android installer app

• Using on board menu driven by push buttons

2010-2-UC240-KIT

Kit UC240 Kit (com caixa) para painel de incêndio, comunicador UltraSync com IP e 4G/2G

Especificações técnicas

General

Product line	UltraSync

Network

Communicator type	2G, 4G, Mobilfunk, IP
GSM frequency	LTE: Penta-Band 700 (Bd28) / 800 (Bd20) / 900 (Bd8) / 1800 (Bd3) / 2100 MHz (Bd1) + GPRS Dual band (900/1800 MHz)

Reporting

Reporting protocols	Kontakt-ID, SIA
Supported receivers	UltraSync

Interfaces

Ethernet	RJ-45 1000 Mbps Ethernet Interface
Antenna	Ja, integriert

Input/Output

Inputs	16 general purpose alarm inputs
Outputs	3 relay outputs

Electrical

Operating voltage	9.5 to 30 VDC
Current consumption	85mA @12 VDC

Physical

Physical dimensions	95 x 67 x 17 mm
Colour	Schwarz

Environmental

Operating temperature	-10 to +55°C
Relative humidity	5 to 75%
Environment	EN50130-5 ; Klasse II - Indoor (allgemein)

Regulatory

Certification	EN50131 Grad 3, EN50136, EN54-21

KIDDE COMMERCIAL

Como empresa de inovação, a Kidde Global Solutions reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 12 November 2026 - 18:57