
AS280G3

Indoor siren, metal housing, NFA2P Grade 3

Product overview

With an elegant design, this siren can be installed in a wide variety of environment up to light industrial situations.
Designed to comply against EN Grade 3 certification, the siren includes an enhanced protection against sabotage. The battery and power supply are fully supervised.

As soon as an intrusion is detected, the indoor siren triggers a powerful 105 dB sound signal.
Its sound and duration can be programmed and its battery has up to 60 hours autonomy.

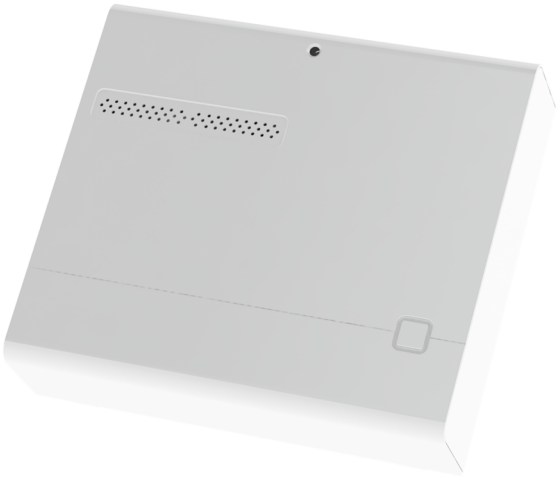

Details

- Battery circuit protection with resettable fuse
- Enhanced tamper protection
- Aritech elegant design
- Self test every 24 hours to check the integrity of the battery and its charging circuit
- Engineer mode (for commissioning and to inhibit sounder operation)

AS280G3

Indoor siren, metal housing, NFA2P Grade 3

Technical specifications

General

Accessory group	Sirene
Type	Indendørs sirene
Sounder output (dB @ distance)	105 dB at 1 m (typical)

Flash specifications

Current consumption	10 mA @ 13.8 V (quiescent)

Electrical

Power supply type	9 VAC
Operating voltage	9 to 15 V
Current consumption	100 mA at 9 to 15 VDC (typical)

Physical

Physical dimensions	187 x 167 x 47 mm
Net weight	1340 g
Colour	Hvid
Material	Stål (malet)

Environmental

Vandal proof	Yes
Operating temperature	-10 to 55°C
Storage temperature	-10 to 55°C
Relative humidity	<95% noncondensing
Environment	EN50130-5 ; Klasa II - Wewnątrz (ogólnie)
IP rating	IP30

Regulatory

Compliancy	CE
Certification	EN50131 Grade 3
Standards	NFA2P Grade 3

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 June 2026 - 15:09