NC-MC-100-RKIT

Avvisatore manuale di allarme convenzionale completo di scatola di montaggio, 100 Ω (rosso)

General

The NC-MC-100-RKIT is a red manual call point with back box for surface mount applications.

The call point offers one normally open contact in series with a 100 Ω resitor, as well as a single pole, changeover contact with common, normally open and normally closed connections. It is supplied with a EN54 style resettable element, pluggable connectors for both contacts, a handy wire bridge to help with cable continuity testing, as well as a test key that doubles up as a service tool for disassembly of the device.

Installation

Installation time and installation flexibility are of paramount importance. The KGS MCP range directly meets these needs by providing features designed specifically for this. Pluggable terminal blocks facilitate the pre-connection of all cables. This terminal block is then simply connected to the MCP. Should continuity testing be needed, the handy wire bridge fits neatly into the terminal block in place of the MCP without having to disconnect any cables.

For service and maintenance no additional tools other than the test key is needed. With easy front access in all installations and even with the protection cover fitted, the test key is also used to remove the front cover of the unit should a frangible element need to be replaced.

Options

Both break glass (frangible elements) and re-settable operating elements may be used. The MCP can be configured as either a break glass or re-settable unit by simply changing from one element to another. Other than the optional frangible element, no additional parts are required. Other parts and accessories include colour matched surface mount boxes, recess mount adapters, trim skirts, flip covers, metal test keys and replacement parts.

This range of manual call points is available in various colours with various trigger resistor options to suit most applications. In addition various function markings are available including regional language variants.



Dettagli

- Progettato per la segnalazione manuale di un allarme incendio
- Indicazione di allarme tramite LED e bandella di allarme
- Estetica migliorata con marcatura funzionale serigrafata ad alta risoluzione
- Resettabile e utilizzabile anche con vetrino a rottura opzionale
- Facile da installare (plug and play)
- Scatola di montaggio inclusa
- Disponibile mascherina di copertura e fascette per antimanomissione in modo da evitare l'attivazione accidentale
- Adattatore retrocompatibile disponibile per applicazioni in sistemi esistenti
- Dispositivo di test a chiave dalla parte anteriore dell'avvisatore manuale per un facile accesso, anche quando è montata la mascherina di copertura
- Manutenzione semplificate grazie alla chiave di prova e ai connettori estraibili

NC-MC-100-RKIT

Avvisatore manuale di allarme convenzionale completo di scatola di montaggio, 100 Ω (rosso)

Specifiche tecniche

Electrical

Power supply type	Zone angetrieben

Detection

Monitoring	Activated, Off
Response time	< 3 s
Installation height	Determined by local regulation

Physical

Colour	Rot (RAL 3028)
Mounting type	Back box, Wandmontage
Material (body)	Schwer entflammbares ABS

Environmental


Vandal proof	No
Environment	Drinnen

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CPR

Prodotti compatibili

Categoria	Riferimento	Descrizione
Detection device	N-MC-FC	Mascherina di copertura in plastica per avvisatore manuale
Detection device	N-MC-FE	Accessori avvisatori manuali - Vetrino a rompere

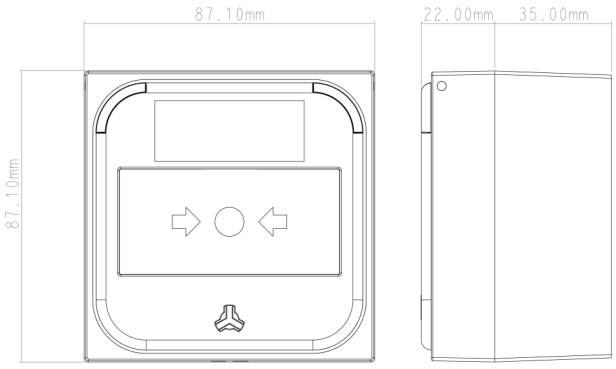

KIDDE COMMERCIAL

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57